

Resinex™ K-8 FG

Strong acid cation softening resin

Resinex™ K-8 FG is a high purity, premium grade, pretreated, strongly acidic gel-type cation exchange resin specially designed for residential drinking water treatment. The K-8 FG is a bead type, crosslinked, polystyrene divinylbenzene resin that offers excellent bead integrity and very low extractables. The product is highly suitable for a wide variety of drinking water treatment applications. **Resinex™ K-8 FG** has a light amber color and is specially pretreated to remove taste, odor and color throw. **Resinex™ K-8 FG** meets the requirements of FDA regulation CFR section 21, §173.25.

Typical Properties

Type	Crosslinked polystyrene divinylbenzene
Form	Gel-type, amber, spherical beads
Functional group	Sulfonic acid
Whole bead count	95% min.
Ionic form, as shipped	Na ⁺
Bead size	(0.42 - 1.25 mm) 16x40 US mesh
Uniformity coefficient	1.60 max.
Bulk density, as shipped	51 lb/ft ³
Real density	1.28 g/cm ³
Water retention	45 - 48%
Total capacity (Na ⁺ form)	2.00 eq/l min.
Volume change Ca ²⁺ → Na ⁺	2% max.
Stability, temperature	248°F max.
Stability, pH	0 - 14
Color throw	25 APHA max.

Key Features and Benefits

- **Pretreated and Rinsed**
Guarantees minimal color throw and eliminates taste and odor
- **High Integrity Beads**
Excellent resistance to mechanical degradation ensures low pressure drop
- **Low Extractables - FDA Compliance**
Specially treated to eliminate leaching of organic matter, assuring compliance with FDA regulation CFR section 21, §173.25

Typical Applications

- Residential Softening
- Industrial Softening
- Municipal Softening

Standard Packaging

- 1 cu.ft. PE valve bag
- 40 cu.ft. super sack

Standard Design Conditions

Bed depth	> 700 mm
Service flow rate	2-5 gpm/ft ³
Backwash expansion	50 - 75%
NaCl concentration for regeneration	8-15%
Regeneration level	80-300 g/l
NaCl flow rate for regeneration	0.25-0.50 gpm/ft ³
Rinse rate (slow)	1-3 bed volumes at regeneration flow rate
Rinse rate (fast)	3-6 bed volumes at service flow rate
Turbidity	<5.0 NTU
Free chlorine	<1.0 ppm




This product has been tested and certified to NSF/ANSI Standard 44 for materials safety only.

A minimum flow of 0.39 gpm per cubic foot of media is required.


Resinex™ K-8 FG

Strong acid cation softening resin


Pressure Drop

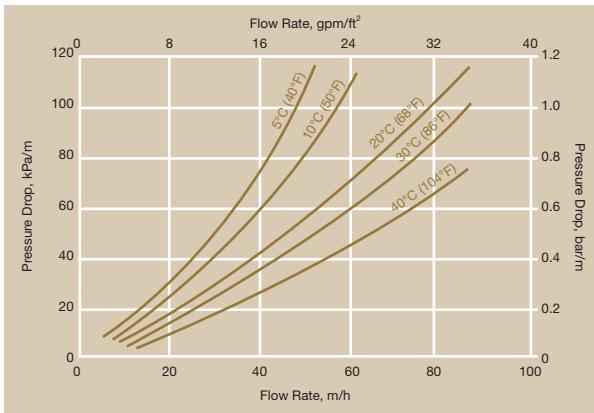


Backwash Expansion

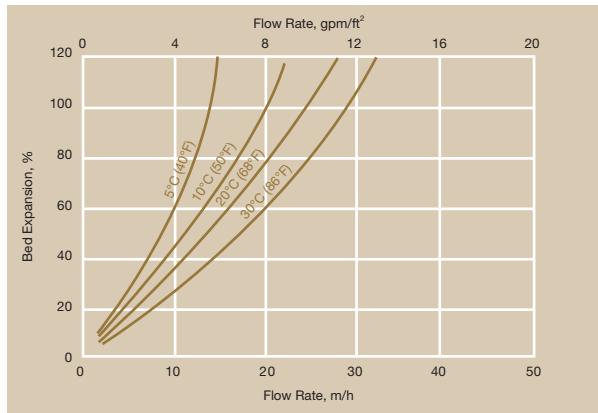

Capacity Information

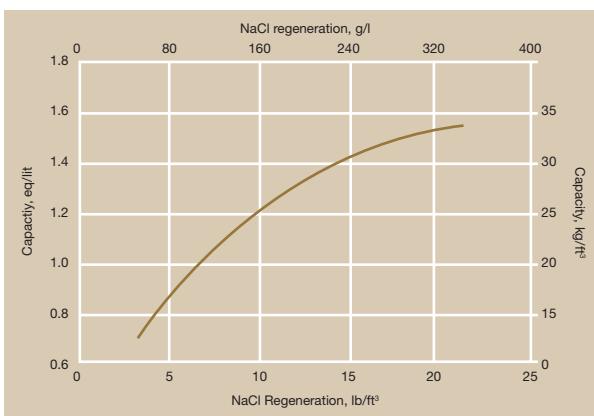

Hardness Leakage Information

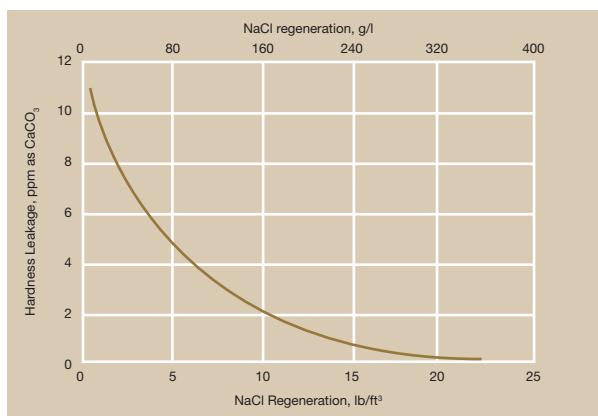

Capacity and Hardness Leakage graphs are shown assuming a service flow of 4 gpm/ft² (32 l/h/m²) and total dissolved solids of 400 ppm and 20 grains of total hardness. The hardness leakage will increase and the capacity will decrease while increasing total dissolved solids and total hardness.

NOTICE If this product is to be used for potable water treatment, or any food grade application, a special procedure must be applied for the initial run. Please ask your nearest Jacobi office for this technical bulletin.

Product Packing



1 cu.ft. polyethylene valve bag
48 bags per pallet



Polypropylene FBCs
super sack, 40 cu.ft.



NOTICE Jacobi Carbons reserves the right to change product specifications without prior notification. The information contained in this datasheet is intended to assist a customer in the evaluation and selection of products supplied by Jacobi Carbons. The customer is responsible for determining whether products and the information contained in this document are appropriate for the customers use. Jacobi Carbons assumes no obligation or liability for the usage of the information in this datasheet, no guarantees or warranties, expressed or implied, are provided. Jacobi Carbons disclaims responsibility and the user must accept full responsibility for performance of systems based on this data.

CAUTION Strong oxidizing agents such as nitric acid can react violently with ion exchange resins and cause explosive type reactions. Before using strong oxidants, consult sources knowledgeable in the handling of these materials.



SWEDEN	FINLAND	GERMANY	UNITED STATES	UNITED KINGDOM	MALAYSIA
Jacobi Carbons AB	Jacobi Carbons AB (SS)	Jacobi Carbons GmbH	Jacobi Carbons, Inc.	Jacobi Carbons Ltd	Jacobi Carbons (Asia) Sdn Bhd
Varvsholmen	Ruoholahdenkatu 8	Feldbergstraße 21	432 McCormick Boulevard	E12 Croft Court, Moss Estate	Lot 12070-F, Jalan Usahajaya,
SE-392 30 Kalmar	Phone: +358-9-643602	D-60323 Frankfurt/Main	Columbus, OH 43213	WN73PT Leigh, Lancashire	Permatang Tinggi, 14100, Penang
Phone: +46-480-417550	Phone: +358-9-643602	Phone: +49-69-719107-0	Phone: +1-215-546-3900	Phone: +44-1942-670600	Phone: +60-4-5886122
FAX: +46-480-417559	FAX: +358-9-642900	FAX: +49-69-719107-20	FAX: +1-215-546-9921	FAX: +44-1942-670605	FAX: +60-4-5886122
Email: info@jacobi.net	Email: infofin@jacobi.net	Email: infode@jacobi.net	Email: infous@jacobi.net	Email: infouk@jacobi.net	Email: infoasia@jacobi.net



jacobi

www.resinex-ixr.com
www.jacobi.net