

EVERPURE® SS-IMF SCALESTICK® CARTRIDGE

INHIBITS MINERAL SCALE DEPOSITS AND PROVIDES CORROSION PROTECTION IN WATER-FED EQUIPMENT*

SS-IMF Cartridge: EV9799-32



APPLICATIONS

Ice
Water-using equipment

FEATURES • BENEFITS

Features Hydroblend™ compound, a unique blend

Translucent cartridge allows simple visual monitoring of product usage and ensure against wasteful premature cartridge replacement

Integral feed cartridge fits Everpure model IMF housings

SS-IMF fits all old style 8" IMF Housings

Spacer (EV3114-69) available for adapting SS-IMF to 10" bowl

Inhibits mineral scale deposits and provides corrosion protection in low flow water-fed equipment*

Patented design dispenses a controlled amount of Hydroblend™ for long-term protection and provides greater effectiveness than standard phosphate treatments

INSTALLATION TIPS

IMF housing not included

Install vertically with black O-band seal up

The SS-IMF may have a very tight fit into older style AR-9 heads. To facilitate installation, warm the top of the SS-IMF (with O-band seal still installed) by running it under hot water for 10 seconds and/or applying a small amount of foodgrade silicone lubricant to the inside of the O-band

Spacer (EV3114-69) available for adapting SS-IMF to 10" bowl

Flushing is not required for ScaleStick® cartridges

OPERATION TIPS

Deliming of equipment prior to application is recommended but not required

Inspect ScaleStick® cartridges at least every six (6) months

Replace ScaleStick® before Hydroblend™ compound is completely dissolved

Pre-existing equipment scale may come loose and clog equipment. Remove any loose scale to assure satisfactory operation

SIZING


Service Flow Rate: 0.1 - 6 gpm (0.3 - 22.7 Lpm)*

Capacity: Approximately six (6) months. Capacity will vary depending on application and water usage. On flow rates less than 1 gpm (3.78 Lpm), capacities may be reduced*

*Not performance tested or certified by NSF®

EVERPURE® SS-IMF SCALESTICK® CARTRIDGE

EV9799-32

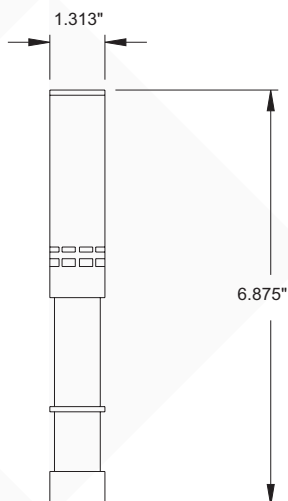

SPECIFICATIONS

Overall Dimensions

6.875" L x 1.312" dia. (17.4 x 3.3 cm)

Capacity

Approximately six (6) months. Capacity will vary depending on application and water usage. On flow rates less than one (1) gpm (3.78 Lpm), capacities may be reduced*.

Service Flow Rate

Maximum 0.1 - 6 gpm (0.3 - 22.7 Lpm)*

Temperature

Maximum 150°F (65.5°C)* If inlet feed water temperature is above 125°F (51.67°C) a hot water housing must be used.

*Not performance tested or certified by NSF



This SS-IMF is Tested and Certified by NSF International against NSF/ANSI Standard 42 for material requirements only.

COMPONENT

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used with disinfected water that may contain filterable cysts.

WARRANTY

Everpure water treatment systems by Pentair® (excluding replaceable elements) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Pentair will provide a copy of the warranty upon request.



© 2014 Pentair Filtration Solutions, LLC

EV9799-32 MR14

DISTRIBUIDOR
AUTORIZADO

 **Loniwater**

Tel.: +52 (999) 920 1972
Email: ventas@loniwater.mx
Sitio Web: www.loniwater.mx

Calle 60 #225-A x 21 y 23-A,
Chuburná de Hidalgo,
C.P. 97208, Mérida, Yucatán.